



TEREX®

HFT 70RS

Rigid Gooseneck Trailer

NET CAPACITY	70,000 lbs (31,750 kg)
ESTIMATED WEIGHT	17,600 lbs (7,983 kg)
DECK LENGTH	29' 5" (8.97 m)
DECK WIDTH	102" (2.59 m)



RIGID GOOSENECK TRAILER
HFT 70RS

Standard Features

Winch	Sub-frame
12,000 lb (5,443 kg) hydraulic winch	Air-ride suspension with dump valve
Winch protector	High pressure hydraulic filter system
Cable length - 60 ft (18.3 m)	LED running lights
1/2 in (12.7 mm) cable	Rubber mounted sealed lights and harnesses
Storage	Radial tires - 235/75R 17.5
Enclosed toolboxes located on both sides of gooseneck	ABS braking system
Weatherproof document storage box	Auto slack adjusters
Loading Ramp	Hub piloted disc wheels
6° break over angle	In-line air filters
Starburst decking	Finish
30,000 lb (13,607 kg) distributed lift capacity (rear main platform)	Two part polyurethane paint
Greasable bushings (folding tail)	1-5/8 in (41.28 mm) Knotless Apitong hardwood decking
Adjustable loading dock height up to 60 in (1.52 m) (rear main platform)	Flush mounted decking
Positive lock indicator lights	Rubber anti-spray and anti-sail mudflaps
Tail lock system	
Counterbalance valves (rear main platform)	

Standard Specifications

Trailer Measurements		Hydraulic Loading Ramp Measurements	
Overall length	48 ft (14.63 m)	Break over angle	6°
Main deck length	29 ft 5 in (8.97 m)	Lifting capacity—distributed	30,000 lbs (13,607 kg)
Deck width	102 in (2.59 m)	Adjustable loading height	Up to 60 in (1.52 m)
Main deck height - loaded	35 1/2 in (90.2 cm)	Overall length (Rear main platform & folding tail)	14 ft 6 in (4.42 m)
Ground clearance - loaded	18 1/2 in (47 cm)	Rear main platform length	9 ft 6 in (2.9 m)
Net frame capacity - distributed	70,000 lbs (31,750 kg)	Folding tail length	5 ft (1.52 m)
Net frame capacity - concentrated	50,000 lbs (22,680 kg) in 10 ft (3.04 m) concentration @ 60 mph (96.5 kph)	Gooseneck Measurements	
Stake pockets/key slots	48 in (122 cm) centers	Break over angle	10°
Center deck key slots	48 in (122 cm) centers	Gooseneck ramp length	10 ft (3.05 m)
Deck cross members	12 in (30.48 cm) centers	Gooseneck deck length	9 ft (2.74 m)
Tires	235/75R 17.5 16 ply	Swing clearance	86 in (2.18 m)
Axle capacity	22,500 lbs (10,205 kg)	Kingpin height	51 in (1.30 m)
Air brakes with ABS braking system	12 1/4 x 7 1/2 in (311 x 191 mm)	Winch line pull	12,000 lbs (5,443 kg)
Estimated weight	17,600 lbs (7,983 kg)	Winch cable length	60 ft (18.3 m) of 1/2 in (12.7 mm) cable

Rigid Gooseneck Trailer

HFT 70RS


Options and Accessories

Options
10 ft (3.05 m) hydraulic gooseneck ramp*
Stake pockets/key slots on 24 in centers
Dual side controls
20,000 lb (9,072 kg) hydraulic winch
Disc brakes (includes 255/70R 22.5 tires)
Two speed landing legs
Polished aluminum wheels (set of 8, two sizes available)
Polished aluminum wheels (set of 8, two sizes available), aluminum outside, steel inside
Canadian option

* Adds 1,600 lbs (726 kg) to the estimated weight

Accessories
Work around guiding winch system
Full width gooseneck ramp (gooseneck ramp option required)
D-rings (outside of deck beams)
Wireless remote (winch only)
Wireless remote (hydraulic decks and winch)
Hydraulic power unit - 27 hp Kohler (This accessory replaces the passenger side gooseneck tool box)
Right weigh system
Air weigh system
Tire inflation system (not available with disc brakes)
Tire pressure visibility kit
Strobe light with battery back-up (tailgate)
Strobe lights on both sides of the rear main platform
Dura-bak™ deck coating (top sides of trailer flanges)
Grouser bars
Chain bar

Dimensions

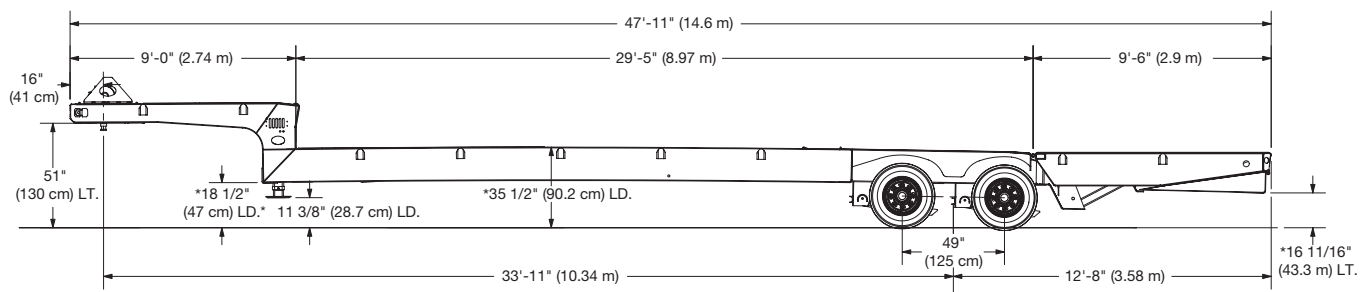

* Add 2 in (5.08 cm) for 255 tires



Genie Industries, Inc.

A Terex Company

18340 NE 76th Street
PO Box 97030
Redmond, WA 98073-9730

TEL +1 (425) 881-1800
TOLL FREE +1 (800) 536-1800
PARTS & TECH SUPPORT +1 (800) 228-6444
FAX +1 (425) 883-3475
WEB www.genieindustries.com

For more information, product demonstration, or details on purchase, lease and rental plans, please contact your local Genie distributor.